

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 4 TWN. 14_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 1-27-10
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: Harrison
Method of Establishment: County: 9-7-1977
IN S.P.C. E Zone, NAD 83 (1986)
Name: 14020401
N: 493 360.139 6(m)
E: 43 389.010 4(m)

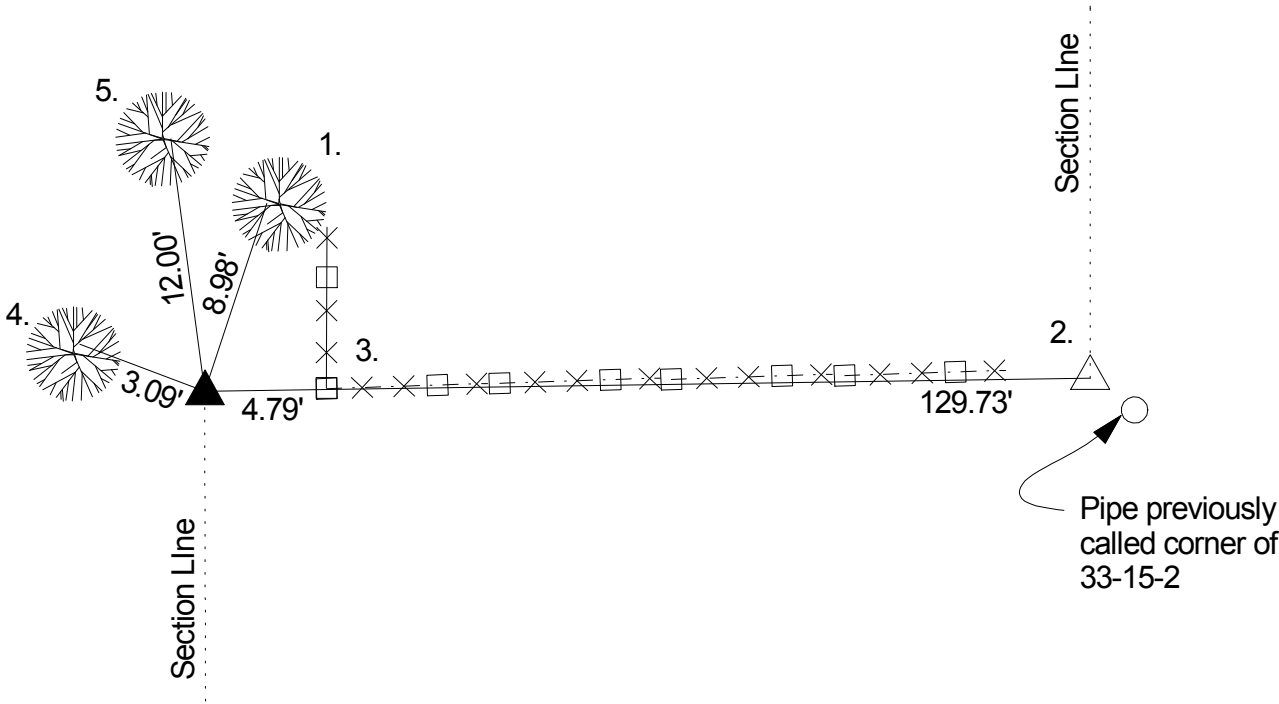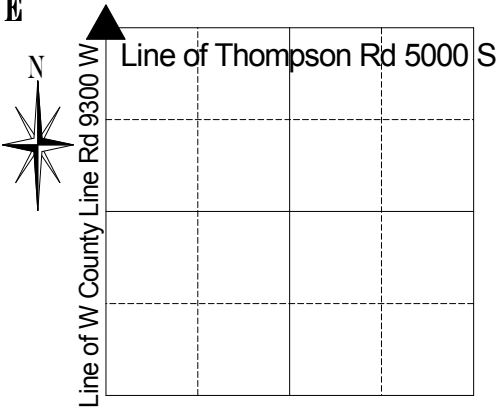

1820 Wm. B. Laughlin set a post with witnesses: 14” dia. beech N 3 W 12 links, 12” dia. beech S 10 E 23 links, as per pg 1 of the Marion County Atlas. H.B. Klausmann 10-1907 pg 42 of the Decatur Twp. Legal Book clearly shows a stone in the corners position, but makes no mention of who or when it was set. 9-7-77 Wilcoxen called a stone. 8-12-85 Wilcoxen excavated the corner and set a #305 cast iron Harrison monument in position of the stone. 9-19-94 Kiste called a Harrison. 12-2-95 Wilcoxen called same. 4-24-2000 Kiste called same. 2-2-05 Whiteside called same. 4-19-06 Kiste called same. 1-27-10 Wilcoxen called same.

REF.	DISTANCE	DESCRIPTION
1.	8.98'	Boat spike W 15" maple 10" up
2.	129.73'	Due E to SW corner of 33-15-2 (Airport disc in concrete) (200 links per Laughlin, 1820)
3.	4.79'	PK nail in S fence post 24" up
4.	3.09'	PK nail w/shiner NE 15" walnut w/ a sign posted
5.	12.00'	Boat spike E 20" hackberry 8" up